

SUPAGARD

AMAZON

NOMINAL RATED DEPTH FILTER CARTRIDGE

SUPAGARD is the latest development in nominal rated spun bonded filter cartridge design.

Manufactured with a true graded density, these elements exhibit a high void volume that results in low clean differential pressure losses and an excellent dirt holding capacity when compared to similarly rated elements. Each cartridge is complete with an integral support for maximum strength. The superior structure remains integral even under severe operating conditions and is less prone to media migration and breakthrough often found on other unsupported spunbonded products.

SUPAGARD cartridges are produced using a unique manufacturing process resulting in the following features:-

Nominal Rated Filter Media

- Available from 1 to 150µm
- Consistent reliable performance

Unique Construction

- One piece high strength all polypropylene support core
- High void volume, resulting in low clean Δp and excellent dirt holding capacity
- End cap welded direct to the core for extra security and strength
- Thermally bonded fibre matrix minimises fibre migration
- One piece construction up to 1016mm (40")
- **SUPAGARD ADVANTAGE** grade featuring moulded end caps and rigid outer support cage
- Optional glass filled core and end caps for high strength / temperature applications

Product Features

- 100% Polypropylene
- Materials meet US FDA Title 21 and USP Class VI requirements
- WRAS listed and Reg 31 approved for use in UK potable water supplies

SUPAGARD fibres are blown continuously onto a central support core, without the need for binders, resins or lubricants. This results in a one piece construction that is resistant to unloading and media shedding. True depth filtration results from the closely controlled fibre production in manufacturing, and also the process environment which ensures a consistent and reliable high quality element.

Elements are available up to 1016mm (40") in length, either double open ended or with most common end cap fittings, and also in 10" and 20" **BIG BLUE** sizes.

SUPAGARD FEATURES AND BENEFITS

- Consistent and reliable performance and efficiency
- Identification embossed on every cartridge
- Graded density structure for maximum dirt holding capacity
- Increased void volume giving high flow rates and low initial pressure losses
- Wide chemical compatibility, using 100% polypropylene to meet FDA requirements
- Range of Nominal ratings from 1 to 150µm
- Thermal bonding process minimises media migration and ensures minimal extractables
- **ADVANTAGE** grade featuring moulded end caps and rigid outer support cage
- **BIG BLUE** large diameter cartridges available in all grades



SUPAGARD

TECHNICAL DATA

Dimensions

Outside Diameter: 64mm
116mm (Big Blue)
Core Diameter: 28mm
Length: See ordering guide


Maximum Operating Conditions

Temperature 07PP: 80°C
07PD: 100°C
07PT: 100°C

Recommended Maximum Differential Pressure: 1.5 Bar

| Maximum ΔP | PP Media PP Core | PP Media GFPP Core | PP Media St.St Core |
|--------------------|---------------------|-----------------------|------------------------|
| @ 20°C | 4.0 | 4.0 | 4.0 |
| @ 50°C | 1.5 | 2.5 | 4.0 |
| @ 80°C | 0.25 | 1.0 | 4.0 |
| @ 100°C | - | 0.5 | 4.0 |

Product validation guide available on request.

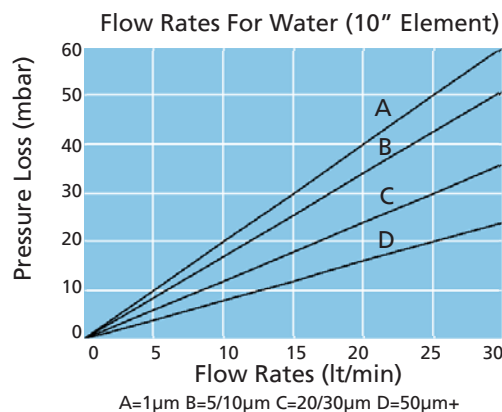

INDUSTRIES AND APPLICATIONS

Food and Beverage

Pharmaceuticals

Fine Chemicals

Petrochemicals

Cosmetics

Water Treatment

Metal Finishing

- Bottled water, Flavours, Polishing lines, Trap filters
- Base product clarification, Membrane pre-filtration, Bulk transfer
- Solvents, Process streams, Water purification, Acids, Alcohols
- Waterflood, Completion fluids, Amine streams, Glycol
- Alcohols, Essential oils, Water lines, Transfer filters
- Membrane protection (Reverse Osmosis, Nano), Resin trap, Potable water
- Plating solutions, Paint and resin products, Wash solutions

AMAZON FILTERS LTD.

ALBANY PARK ESTATE, FRIMLEY ROAD,
CAMBERLEY, SURREY, GU16 7PG
ENGLAND

Tel: +44 (0) 1276 670 600

Fax: +44 (0) 1276 670 101

Email: sales@amazonfilters.co.uk

Web: www.amazonfilters.co.uk



Certificate No. FM39584

Distributed by: