

# CONTOUR

AMAZON

## LARGE DIAMETER DEPTH FILTER CARTRIDGE

**CONTOUR** spun bonded cartridge filters utilise the very latest in high strength fibre production to create a large diameter core-free element. Engineered to operate in high flow applications, the high capacity, low pressure loss media is an ideal choice for use in a wide range of water and chemical processes. No resins, binders or other materials are used in the manufacturing process, this results in a fibre free, uncontaminated process fluid. Utilising the housings own integral support core, this cartridge shows excellent performance in terms of life, disposal costs and overall cost effectiveness when compared to conventional cartridges.

**CONTOUR** cartridges are produced using a unique manufacturing process resulting in the following features:

### High Efficiency Filter Media

- Available from 5 to 100µm+
- Consistent reliable performance

### Unique Construction

- Core-free design
- Free from resin binders
- High void volume, resulting in low clean  $\Delta p$  and excellent dirt holding capacity
- Thermally bonded fibre matrix stops fibre migration
- One piece construction up to 1013mm (40")

### Product Features

- 100% Polypropylene or Nylon 6 throughout
- Materials meet US FDA Title 21
- WRAS listed and Reg 31 approved for use in UK potable water supplies (PP only)
- No resins, binders or anti-static agents
- True graded density for enhanced life

**CONTOUR** fibres are blown continuously onto a central production mandrel, without the need for resin binders or lubricants. This results in a one piece, core-free construction that is resistant to unloading and media shedding. True depth filtration results from the closely controlled manufacturing process and environment, which also ensures a consistent and reliable high quality element.

Elements are available in two standard sizes, 508mm (20") and 1013mm (40"), double open ended format.



## CONTOUR FEATURES AND BENEFITS

- Consistent and reliable performance and efficiency
- No resin binders - thermal bonding process stops media migration and ensures minimal extractables
- Identification imprinted on every cartridge
- Graded density structure for maximum dirt holding capacity
- Increased void volume giving high flow rates and low initial pressure losses
- Wide chemical compatibility, using 100% polypropylene or nylon media
- Range of ratings from 5 to 100µm+

CONTOUR

## TECHNICAL DATA

### Dimensions

Outside Diameter: 152mm  
 Inside Diameter: 114mm  
 Length: 508 and 1013mm


### Maximum Operating Conditions

Temperature 14PW: 80°C  
 14NW: 150°C

Recommended Maximum Differential Pressure: 1.5 Bar

Maximum $\Delta P$	PP Media	Nylon Media
@ 20°C	3.0	3.0
@ 50°C	1.5	2.5
@ 80°C	0.25	2.0
@ 130°C	N/A	1.0
@ 150°C	N/A	0.5

Product validation guide available on request.

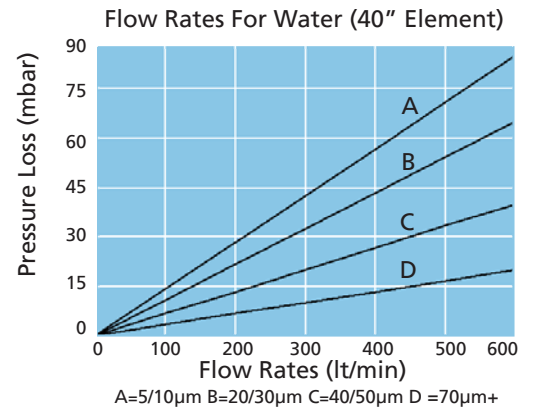

## INDUSTRIES AND APPLICATIONS

### Food and Beverage

### Fine Chemicals

### Petrochemicals

### General Engineering

### Metal Finishing

### Automotive

- Bottled water, Polishing lines, Powder Trap filters
- Solvent trap filters
- Amine streams, Glycol solutions, Hydrocarbon (Kerosene), Wax based materials
- Return condensate
- Wash systems, Feed waters
- Electrophoretic paints, Phosphate lines, Pre treatment rinse

## AMAZON FILTERS LTD.

ALBANY PARK ESTATE, FRIMLEY ROAD,  
 CAMBERLEY, SURREY, GU16 7PG  
 ENGLAND

Tel: +44 (0) 1276 670 600

Fax: +44 (0) 1276 670 101

Email: [sales@amazonfilters.co.uk](mailto:sales@amazonfilters.co.uk)

Web: [www.amazonfilters.co.uk](http://www.amazonfilters.co.uk)



Certificate No. FM39584

Distributed by: